

## TP 127y

TP 127 is ideal for applications requiring load-bearing capacity over longer spans.

The profile thickness is calculated based on specific conditions. In this case, the profile is used as a cold exterior roof and should be installed with the side overlap on the profile crest to reduce the risk of water infiltration. The use of sealing strips and side overlap screws further enhances waterproofing.

The profile is an excellent choice for applications such as canopy roofs, carports, and similar structures with span requirements of up to 8 meters. The sheet can also be placed over multiple spans or with extended overlaps to achieve the most efficient solution.


- **Material:** Hot-dip galvanized painted steel sheet / Galvanized
- **Thickness:** 0.70 - 1.25 mm
- **Weight:** 8.58 - 15.33 kg/m<sup>2</sup>
- **Effective Width:** 960 mm
- **Length:** 1,500 - 15,000 mm



[Contact us](#)




•

•

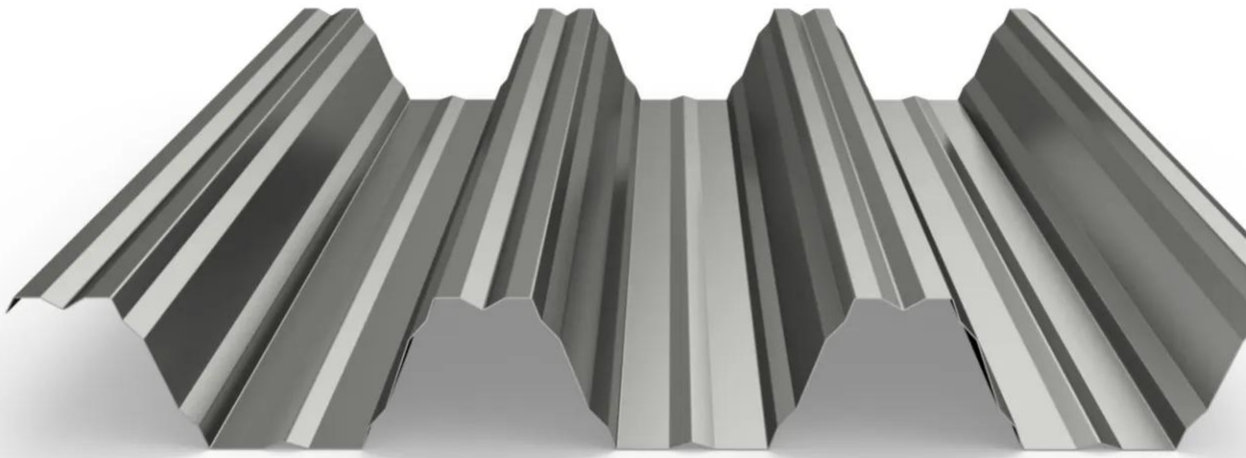

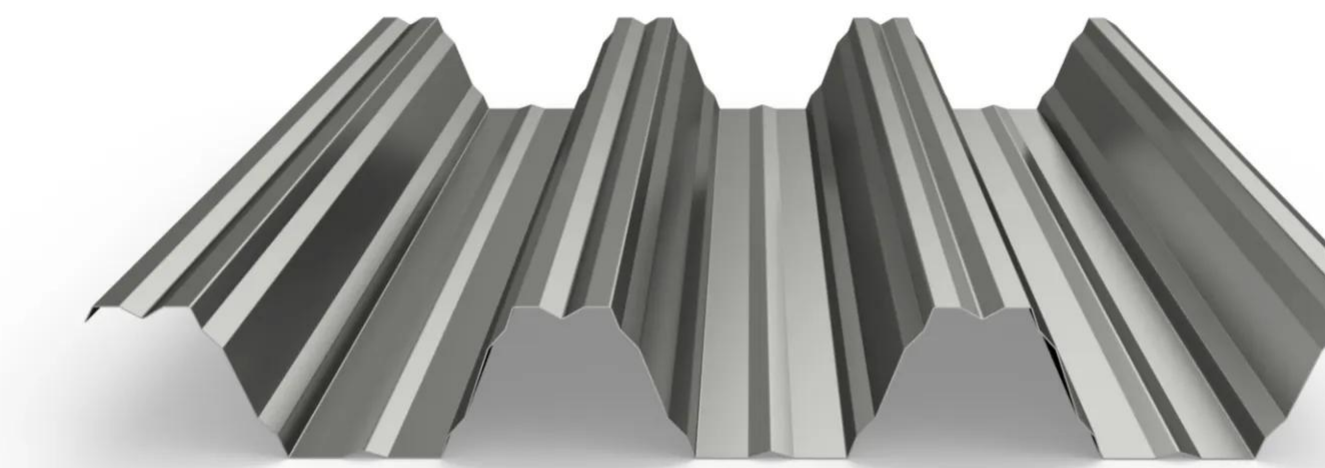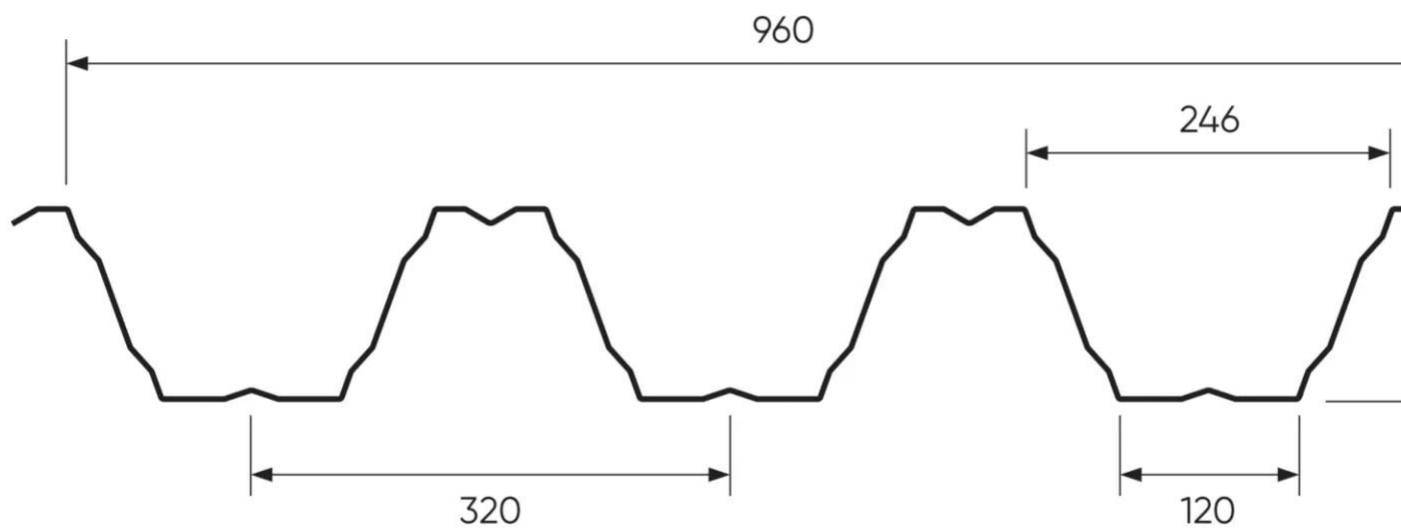

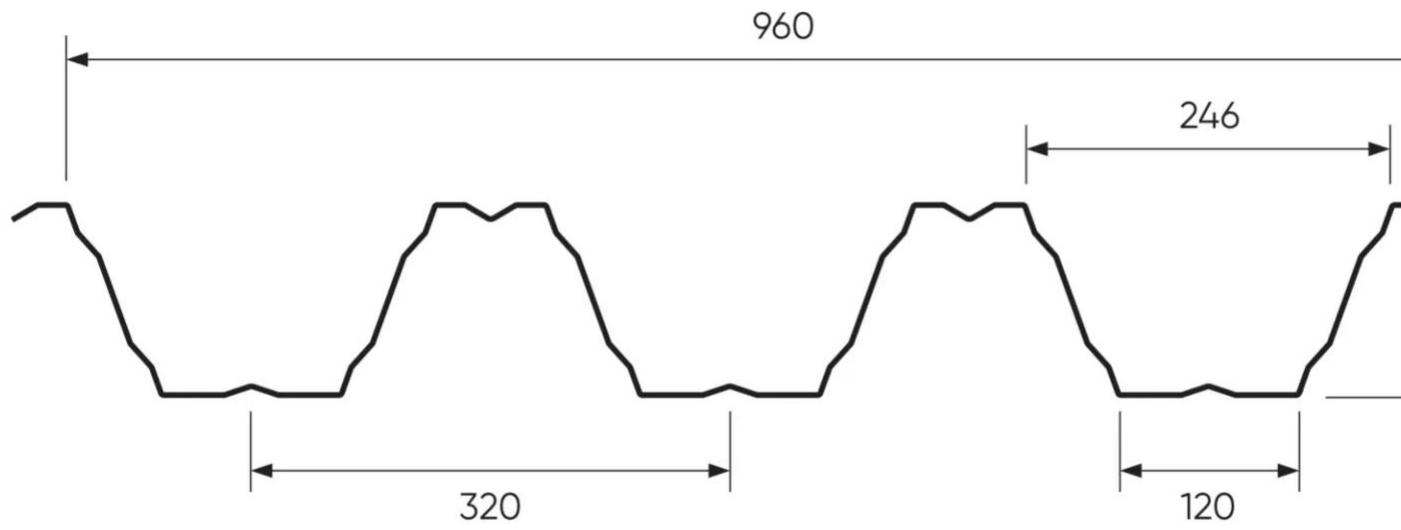

## Properties

## Accessories


[Request informations](#)

## Related products

[Request informations](#)

## Technical documents


### Documents

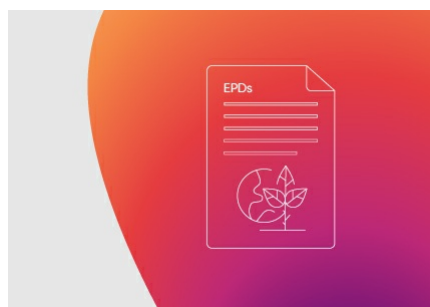

EPD TP127Y Polyester

[View document](#)

## Technical & commercial documentation

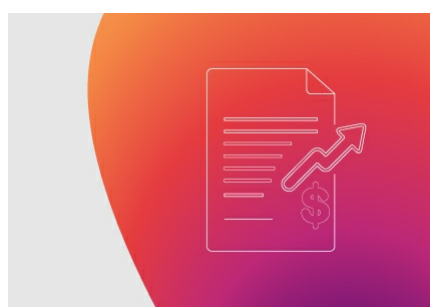

Produktkatalog Sverige

[View document](#)