

## Cofraplus® 220

The additive floor Cofraplus® 220 combines the high strength of the patented deep-rolled steel floor decking with that of the reinforced concrete slab. An ease & fast installation, lightness & especially large spans are the characteristics of this process providing grecharacteristics at freedom for any application.

- Enables spans of the floor decking up to 5,50m without propping and up to 9,0m with propping during concreting
- Highly flexible in use: lightweight profile with 12.5kg/m making it placeable by hand, thus reducing costs related to lifting equipment
- Compatibility with steel, concrete or wood framed structures makes it suitable for new construction, extensions and renovations
- Fire resistance of 60 to 120min thanks to the simple integration of rebar in the rib
- Discover the product [video](#)

[Contact us](#)




•




•

750

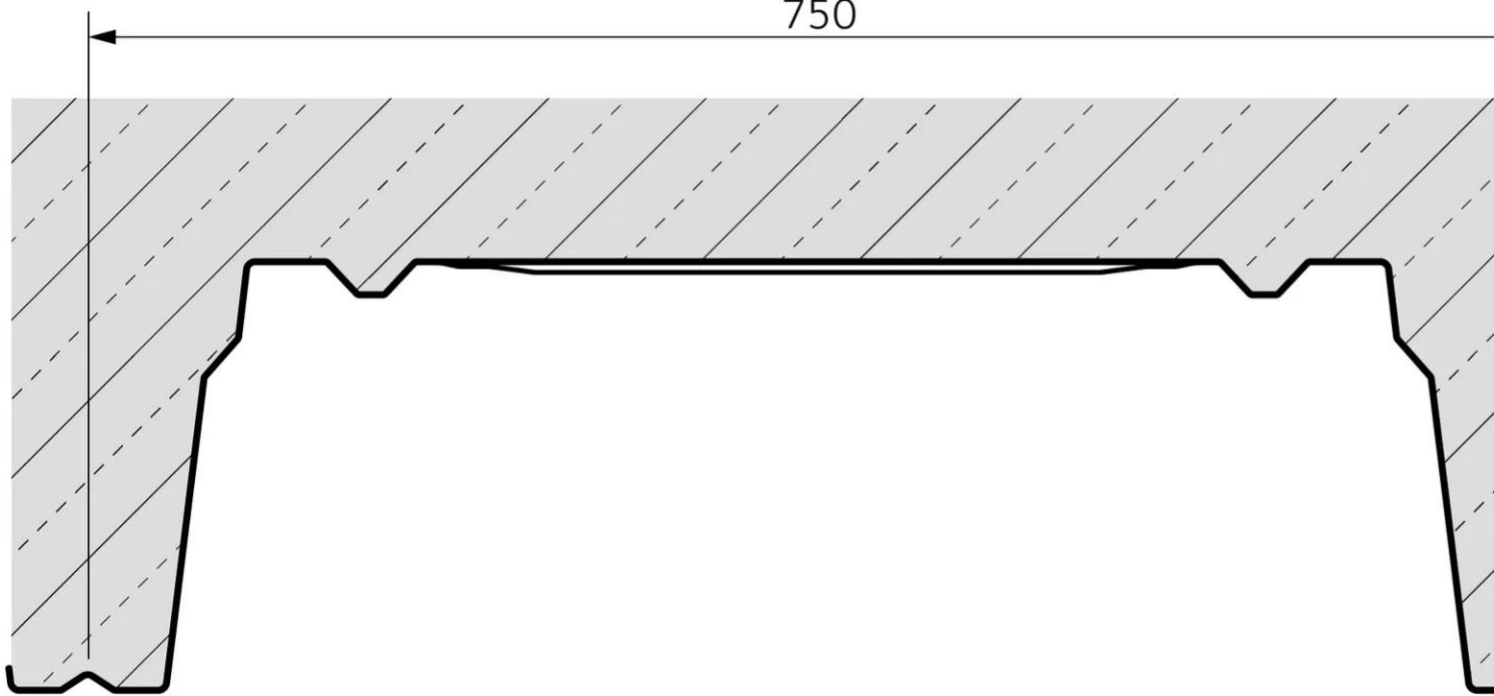

750

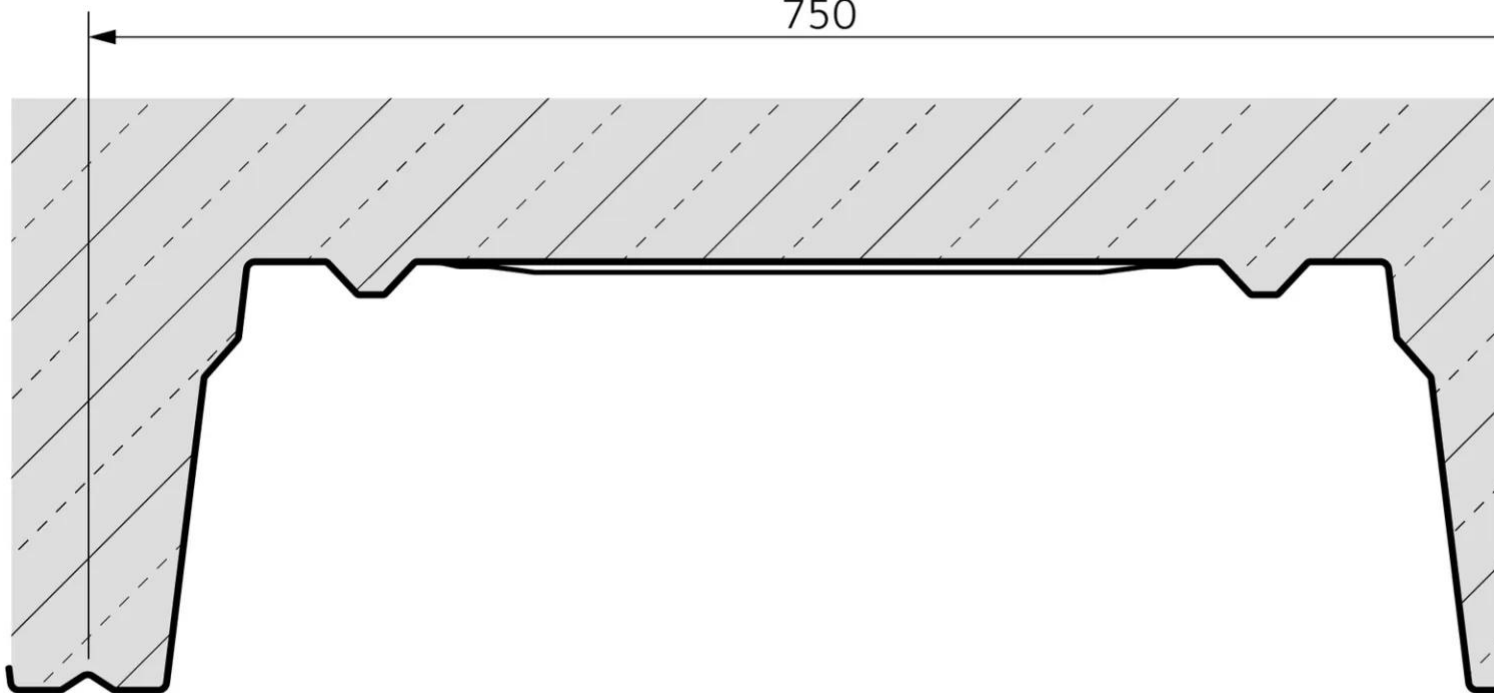

## Properties

## Accessories

[Request informations](#)


## Related products

[Request informations](#)

## Technical documents


[Request informations](#)

## Technical & commercial documentation

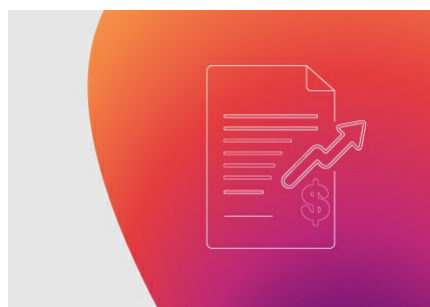

Installation guidelines Cofraplus® 220

[View document](#)

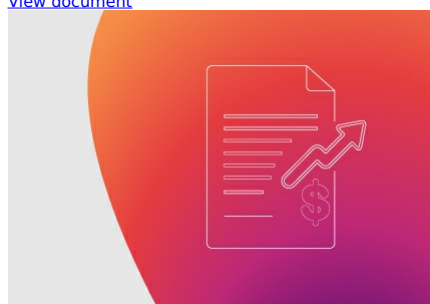

Technical datasheet Cofraplus® 220

[View document](#)