



## Frequence® 9.115.25T


This corrugated roofing profile has cover width of 920 mm and can be complemented with a condensation regulator.

- 3 thicknesses of steel available, from 0.75 to 1.00 mm
- Maximum length 11 000 mm
- Available with condensation regulator Haircotherm
- Realizable in Touch Gloss & Touch 2B stainless steel in thickness 0.80 mm and lengths from 2 m to 6.50 m

[Contact us](#)



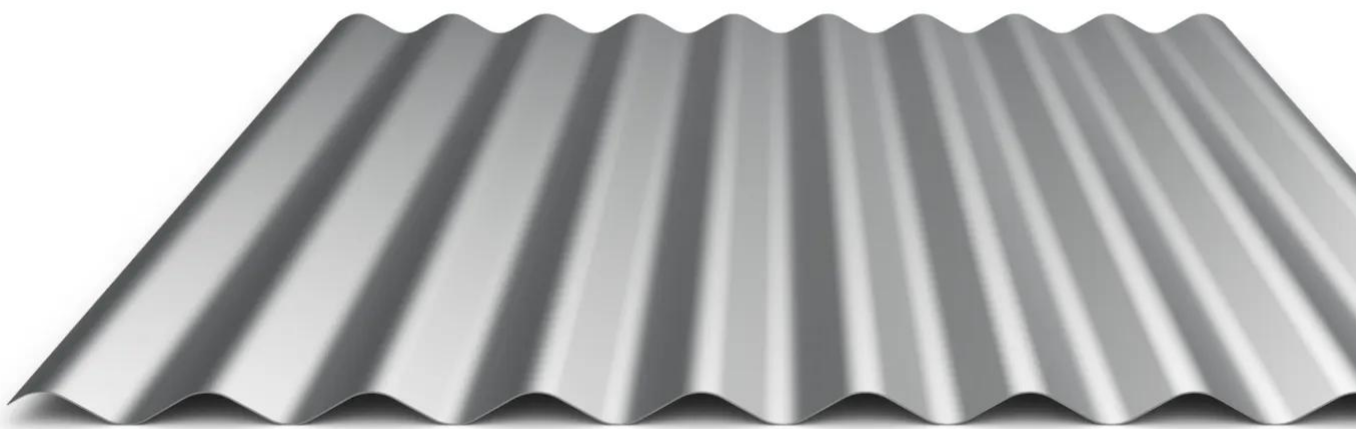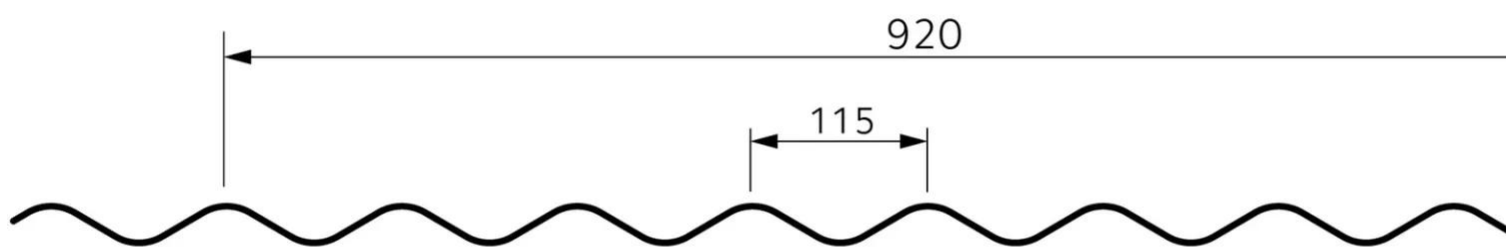

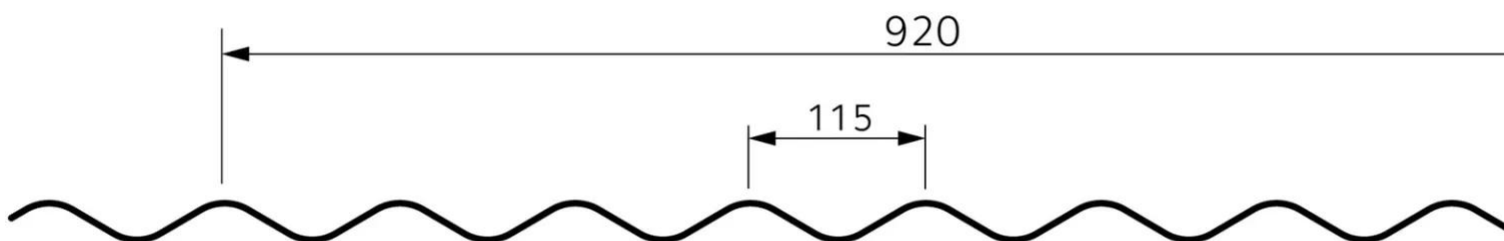

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation

[Request informations](#)