

Globalroof® CN 125C

CN 125 C is a basic double skin system with an inner structural louvered tray and an external steel profile, lower and upper profile running perpendicular. The system offer acoustic absorption.

Composition :

- Load Bearing tray Hacierco C 400.90 perforated C ou P in thickness 0.75mm
- Panolene cladding in thickness 30mm (Isover - black glass veil)
- Flexible glass wool roll coated with an aluminum vapor barrier in thickness 80mm (Isover)
- Profiles Frequence. Authentique or Trapeza


Performances and charaterisitics :

- Acoustic absorption $\alpha_w = 0.35$
- Thermal transmittance $U_p = 0.87 \text{ W/m}^2 \cdot \text{K}$ estimated
- Weight: 18kg/m
- Spacing: 11cm. not including the height of the roof profile


[Contact us](#)



•

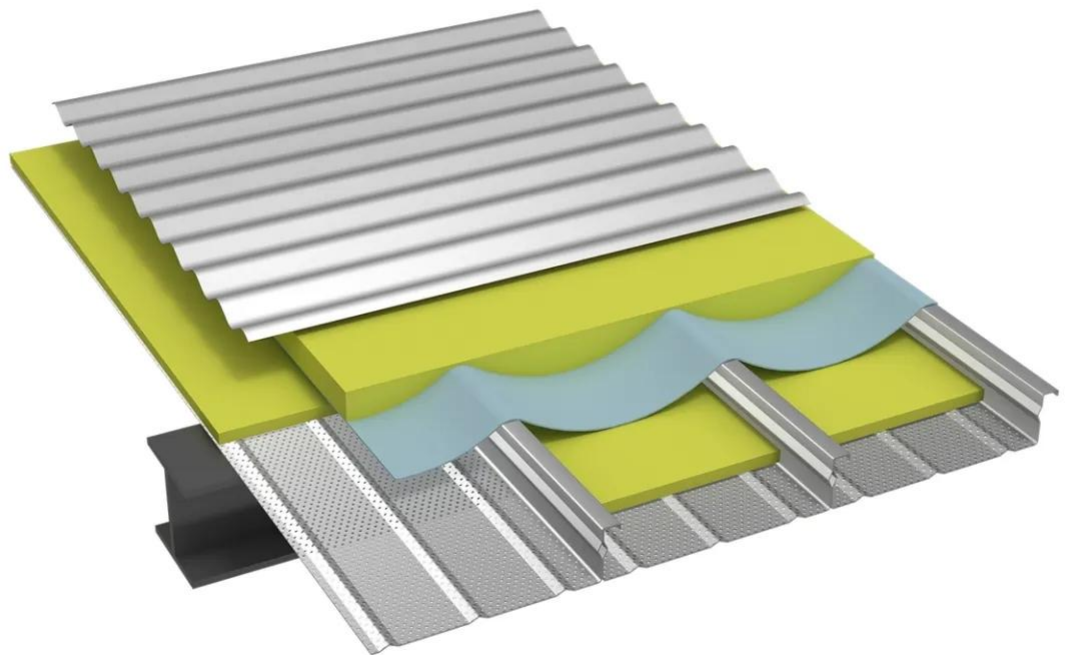

•

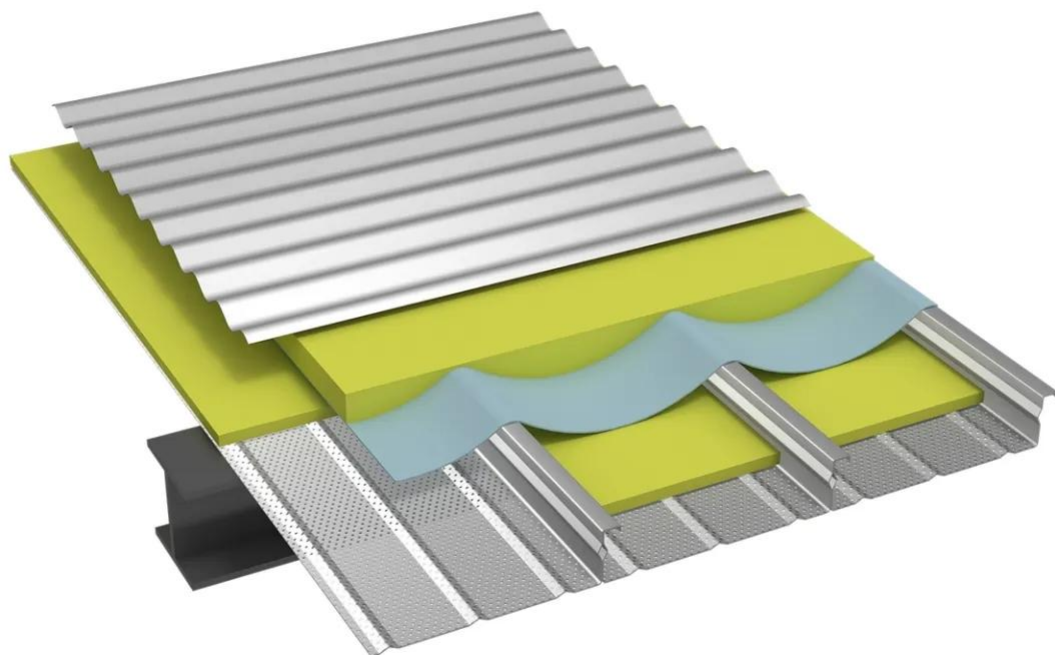

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)