

Globalroof® CN 125RT1P

CN 125 RT 1P is a double skin system with an inner structural perforated tray and an external steel profile. the system offer certified acoustic absorption, sound insulation and an estimated Up 30W/m².K.

Composition

- Non load-bearing Tray Hacierco C 450.70 perforated P in thickness 0.75mm
- Panolene cladding in thickness 70mm
- Purlin Multibeam on cleats
- Flexible glass wool roll coated with an aluminum vapor barrier
- Thickness 80mm unrolled between Purlin (Isover)
- Flexible glass wool for cladding covered with aluminium foil in thickness 60mm clamped on the purlin (Isover)
- Profile Frequence. Authentique or Trapeza in thickness 0.75mm


Performances et characteristics

- Sound reduction index $R_w(C;Ctr) = 36(-2;-8)$ dB
- Acoustic absorption $\alpha_w = 0.90$
- Thermal transmittance $U_p = 0.30$ W/m².K estimated
- Weight: 21kg/m²
- Spacing: 21cm. not including the height of he external weather profile


[Contact us](#)



•

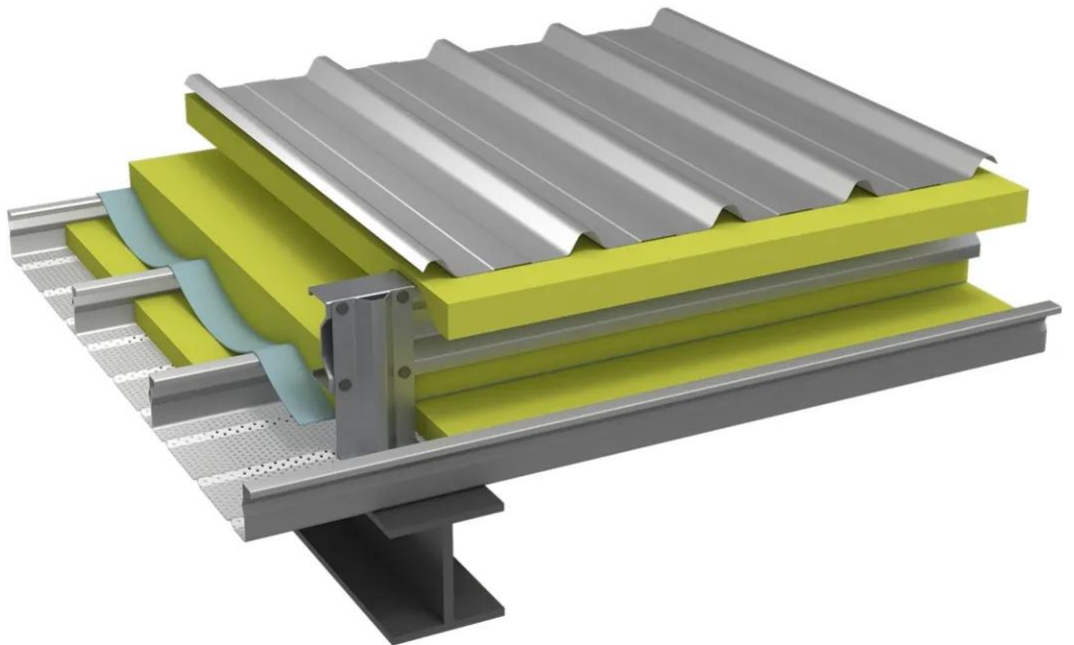

•

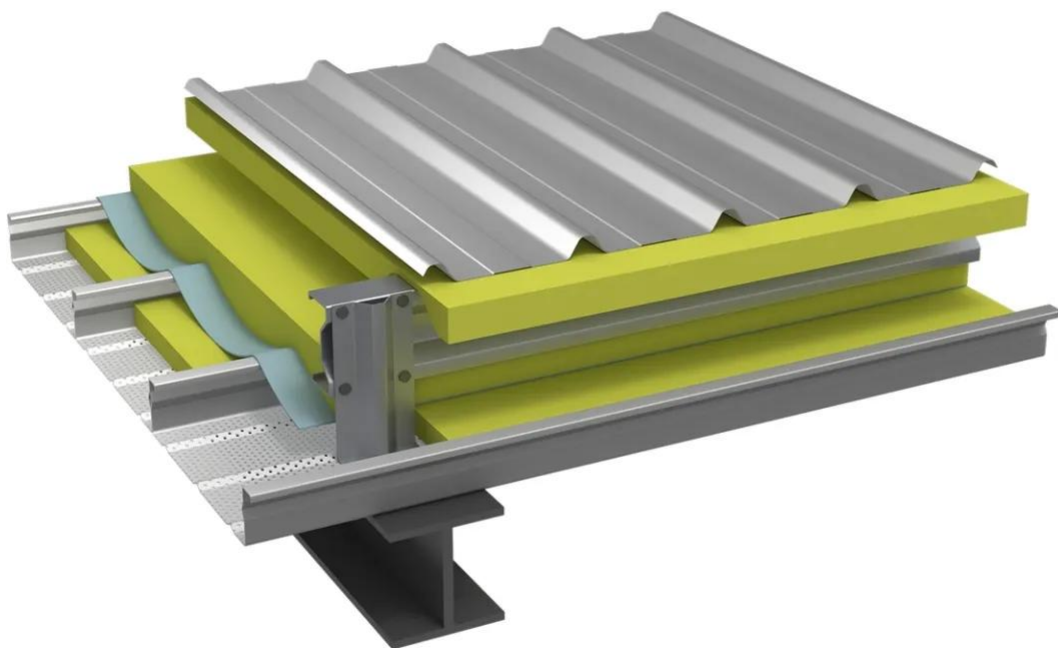

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)