

Globalroof® IN 225TR

IN 225 TR is a double skin system with an inner structural tray and an external steel profile with a minimum thickness of 1.25mm. It delivers a very high level of sound insulation. Estimated Up 0.24W/m².K.

Composition :

- Non load-bearing tray Hacierco C 500.90 in thickness 0.75mm
- Cleats or steel spacer
- Mineral wool Sorock 70mm thick (Rockwool)
- Vapor barrier
- Purlin
- Mineral wool Toroc 200mm thick (Rockwool)
- Additionnal glass wool insulation nipped on the purlin to fill the air gap
- Profile Trapeza in thickness 1.25mm


Performances and characteristics :

- Sound reduction index $R_w(C;Ctr) = 55(-4;-12)$ dB
- Thermal transmittance $U_p = 0.24W/m^2.K$ estimated
- Weight: 36kg/m²
- Spacing: 29cm. not including the height of the external weather profile


[Contact us](#)



•

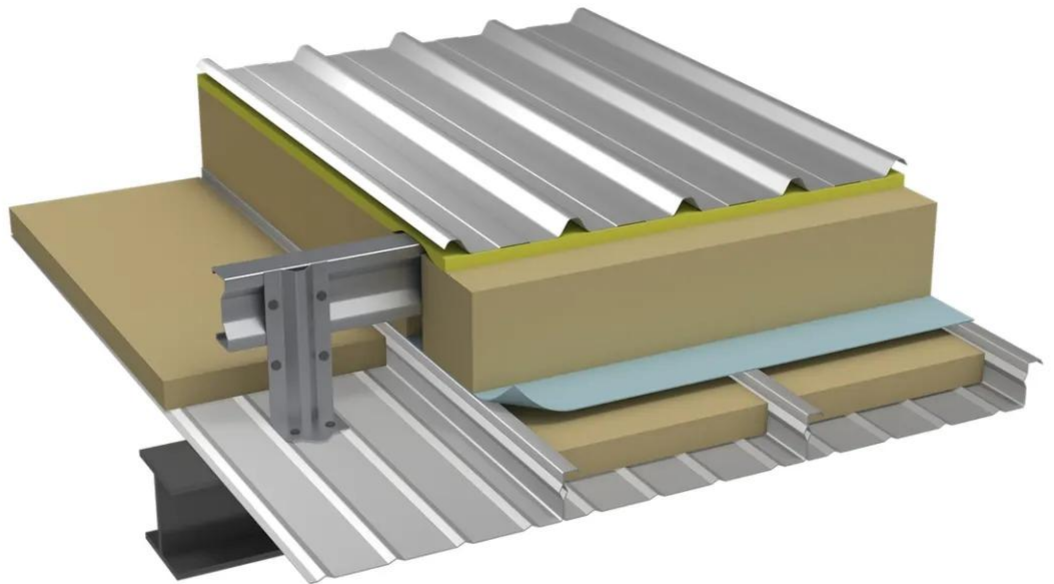

•

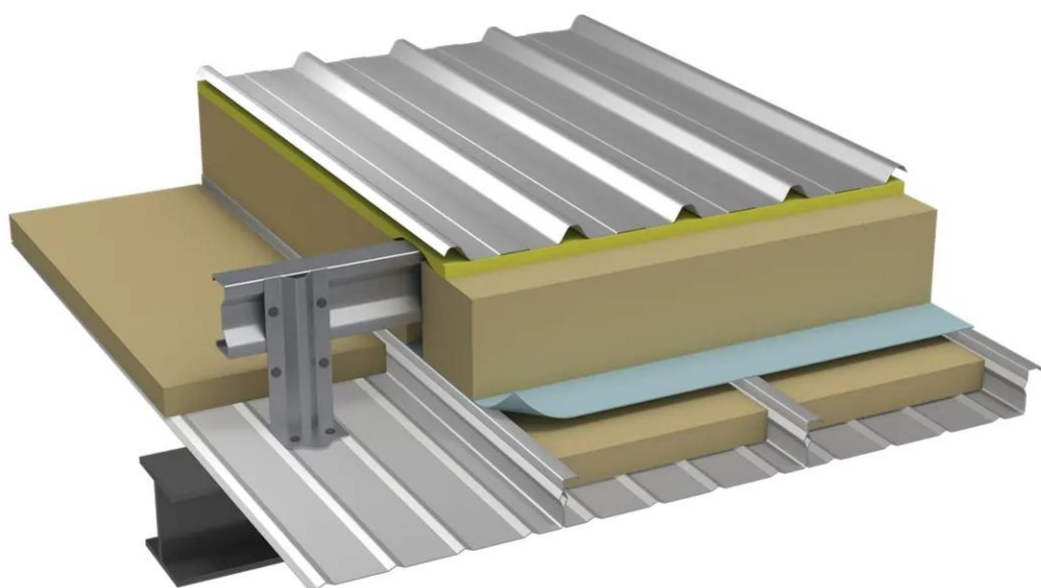

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)