

Globalroof® CN 1115i PVC

Thermal-acoustic flat roof system made of fully perforated roof deck providing acoustic absorption.

Composition :

- Profile Hacierco 56SPS with a thickness of 0.75 mm
- Parvason (Isover)
- Panotoit with a thickness of 90 mm (Isover)


Performance and characteristics :

- PVC membrane
- Sound reduction index $R_w(C;Ctr) = 29(0;-3)$ dB
- Acoustic absorption $\alpha_w = 0.75$
- Thermal transmittance $U_p = 0.33$ W/m².K estimated
- Weight: 22 kg/m²
- Spacing: 15 cm


[Contact us](#)



•

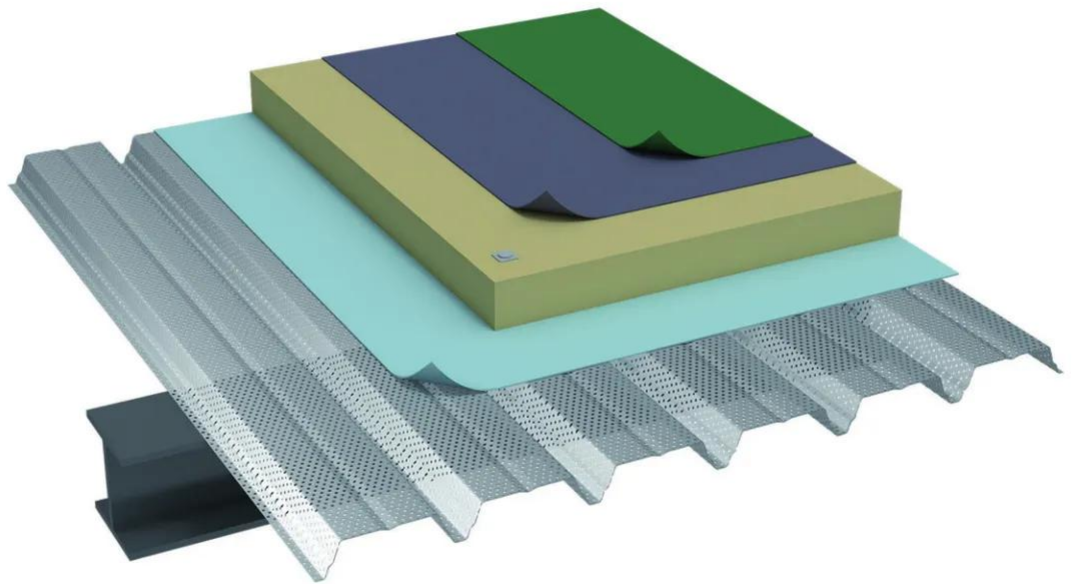

•

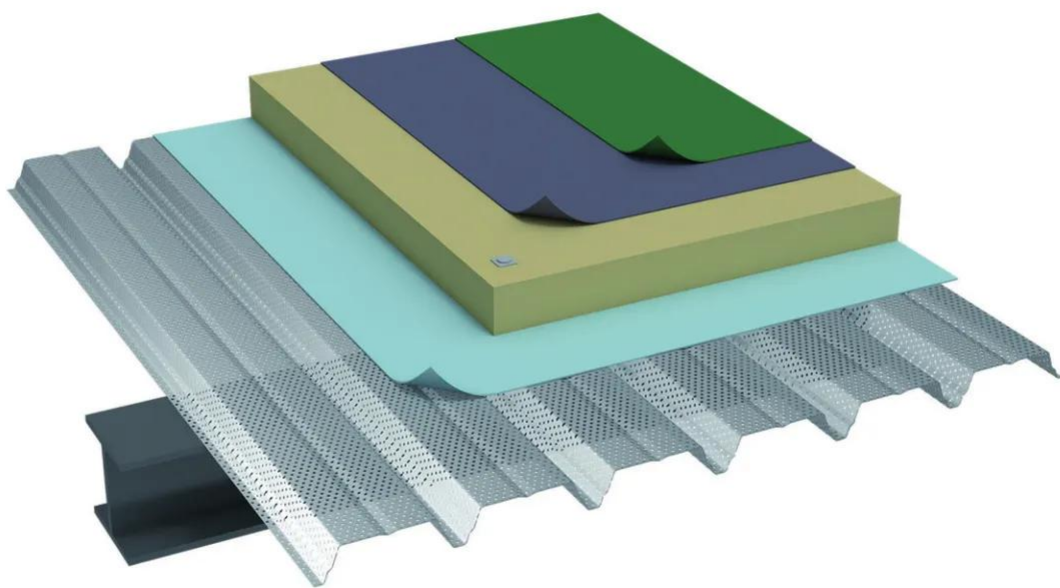

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)