

Globalroof® CN 1115i Bitume

CN 1115 i Bitume is a thermal-acoustic flat roof system made of perforated roof deck providing acoustic absorption for building requiring a aesthetic ceiling. The roof deck profile has been designed to hide the insulation fixation.

Composition :

- Profile Hacierco 56SPS with a thickness of 0.75 mm
- Parvason (Isover)
- Panotoit 90 mm or 130 mm thick (Isover)
- Multi layer bituminous waterproof membrane


Performance and characteristics :

- Sound reduction index $R_w(C;Ctr) = 32(-1;-4)$ dB
- Acoustic absorption $\alpha_w = 0.75$
- Thermal transmittance $U_p = 0.46$ W/m².K estimated
- Weight: 28 kg/m²
- Spacing: 15 cm


[Contact us](#)



-

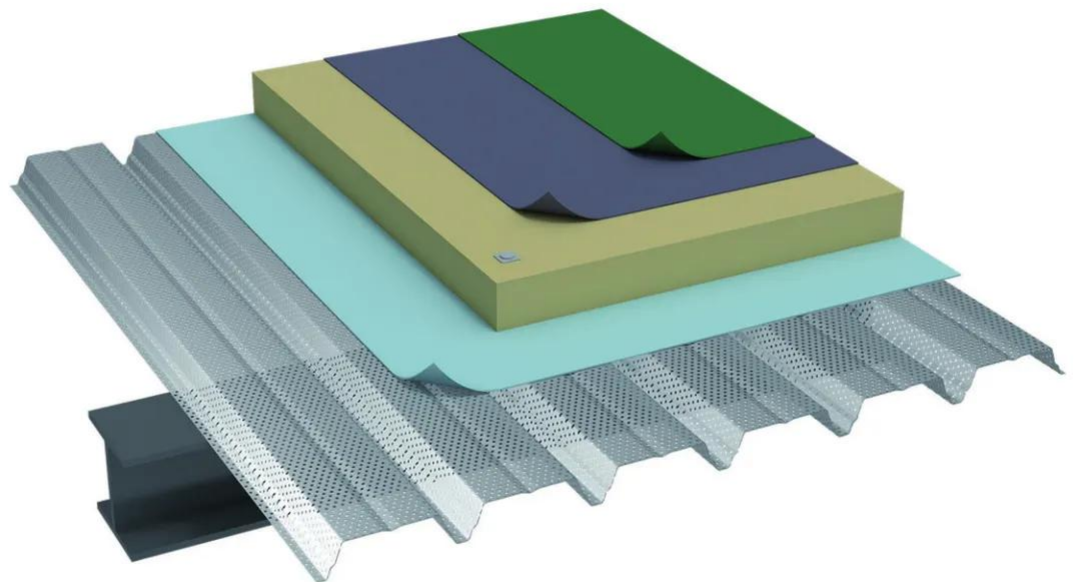

-

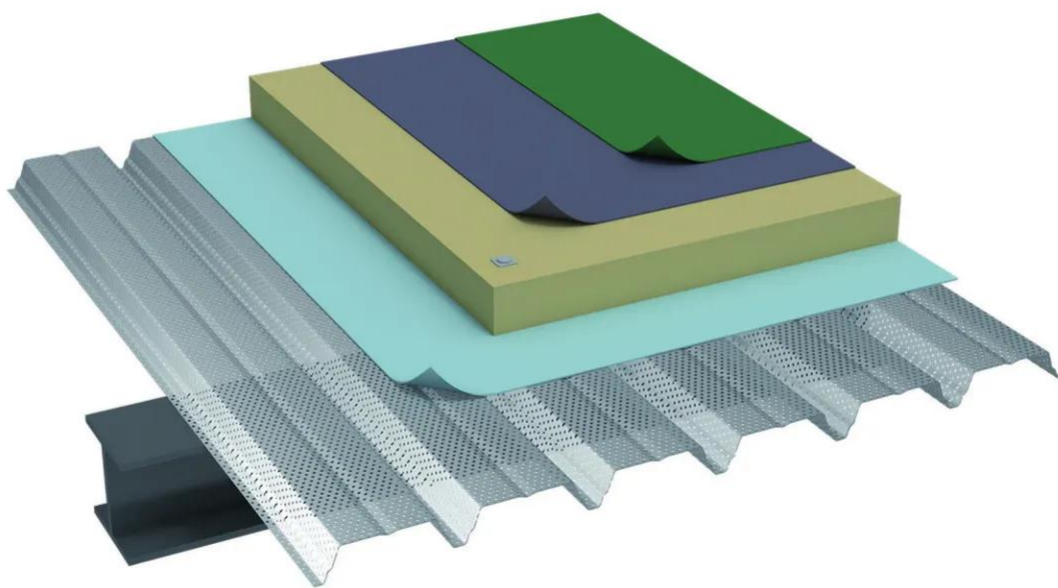

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)