

## Globalroof® CN 1116 Fivvacoustic A

CN 1116 Fivvacoustic A is a thermal-acoustic flat roof system made of fully perforated roof deck providing very high level of acoustic absorption.

### Composition

- Profile Hacierco 74 SPS or Hacierco 56 SPS in thickness 0.75mm
- Glass wool felt covered by a vapor barrier alu Parvacoustic VN , thickness 30mm (Isover)
- Alphatoit 37 in thickness 160mm (Isover)
- Multi layer bituminous waterproof membrane


### Performance and charateristics

- Sound reduction index  $R_w(C;Ctr) = 34(-1;-5)$  dB
- Acoustic absorption  $\alpha_w = 1.00$
- Thermal transmittance  $U_p = 0.25W/m^2.K$  estimated
- Weight:  $34kg/m^2$
- Spacing: 25cm


[Contact us](#)



•

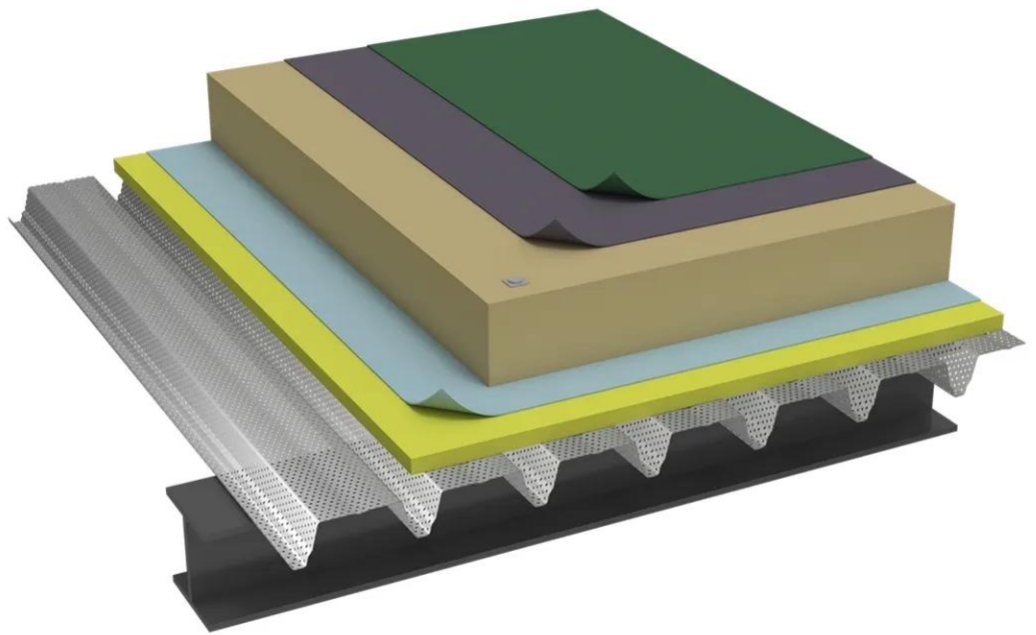

•

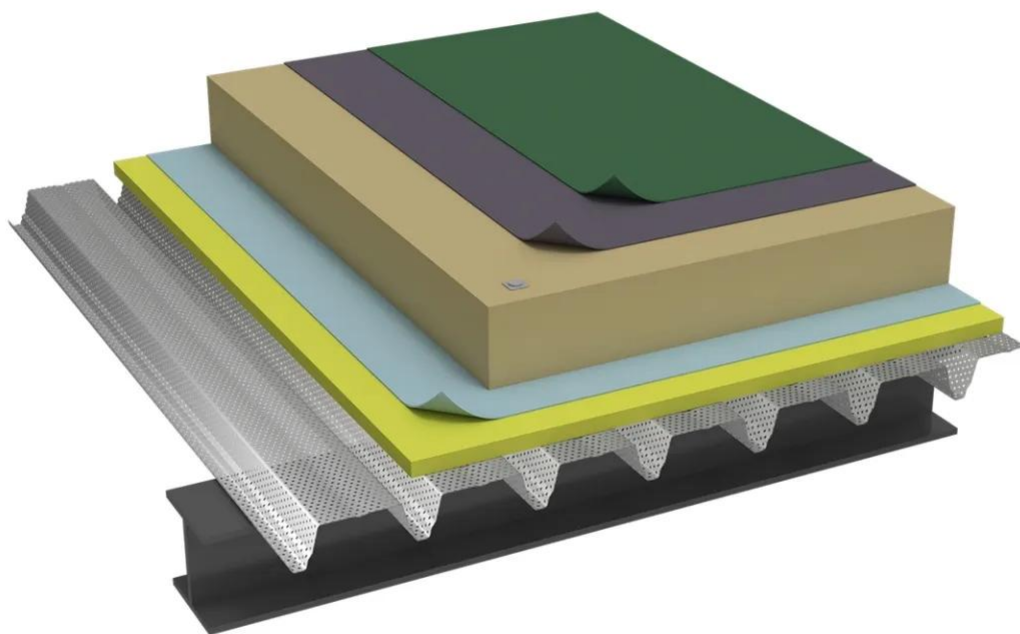

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation

[Request informations](#)