


## Hacierco® 4.250.40


This roof decking profile is the market reference. It has a cover width of 1 000 mm, a height of 39 mm and a valley opening of 70 mm. The solid version includes transversal stiffeners on upper flanges. It can be punctured (Hacierco 40SRC) or perforated on top flanges (Hacierco 40SRP) for a better sound absorption.

- 4 thicknesses of steel available, from 0.75 to 1.25 mm, in solid or perforated version
- Unique thickness of 0.75 mm for the punctured version
- Span up to 3.15 m in solid version 0.75 mm
- Maximal length 15,000 mm
- BIM object available [here](#)

[Contact us](#)




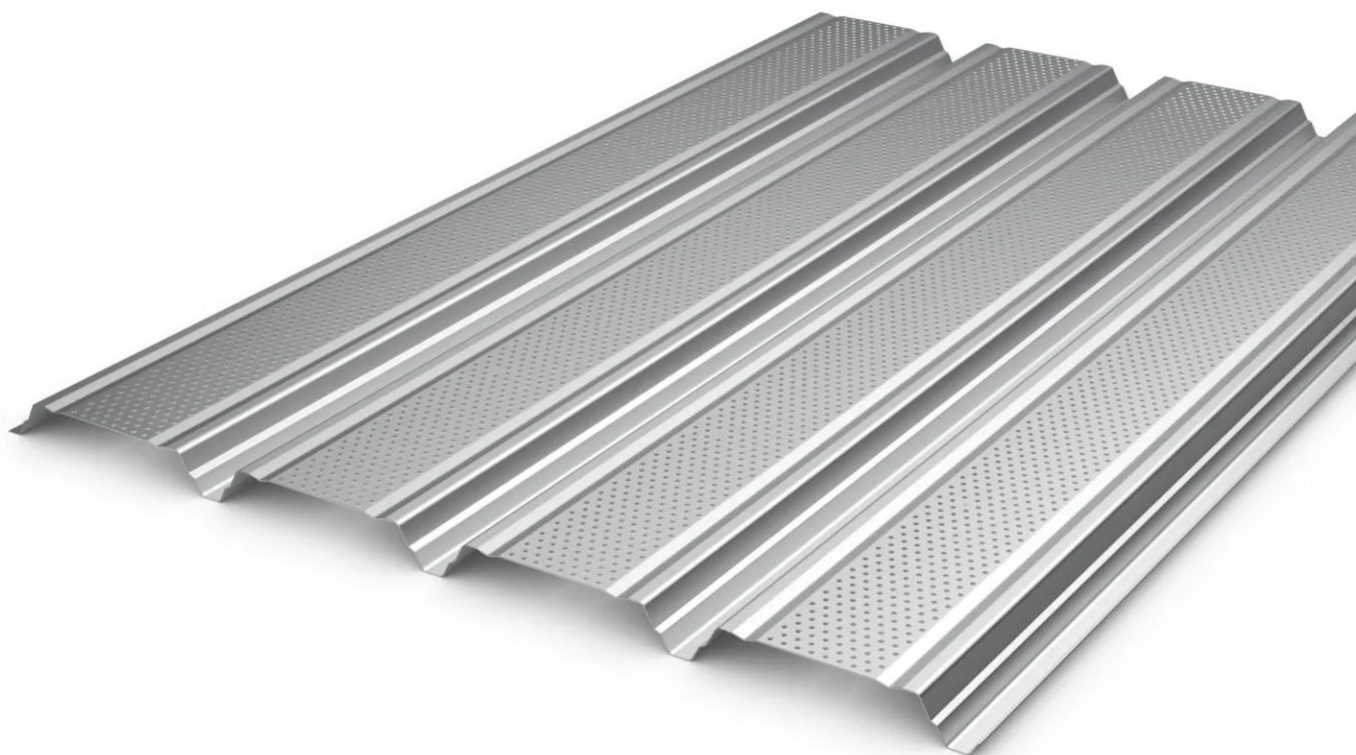

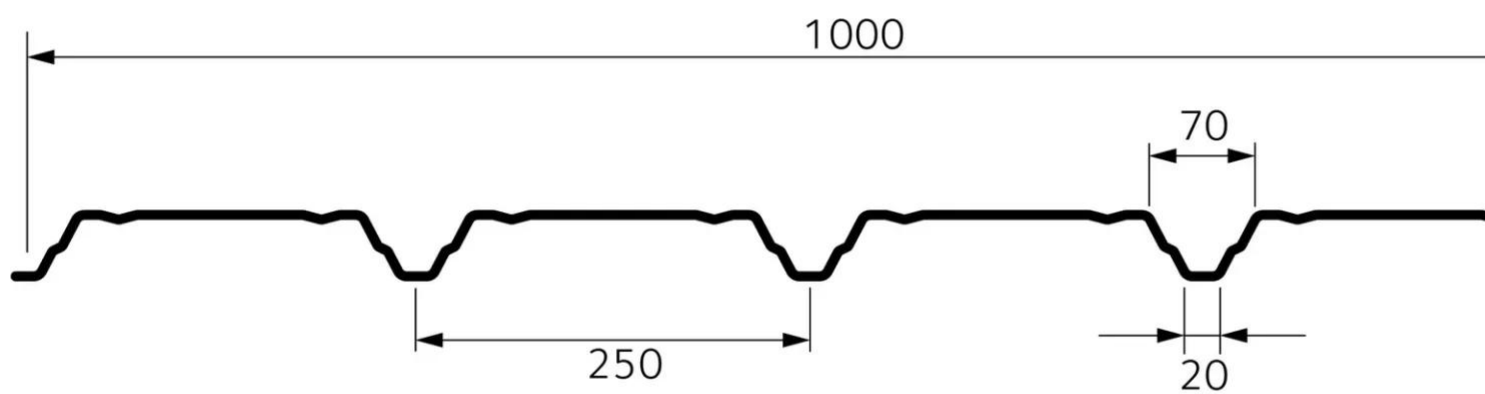





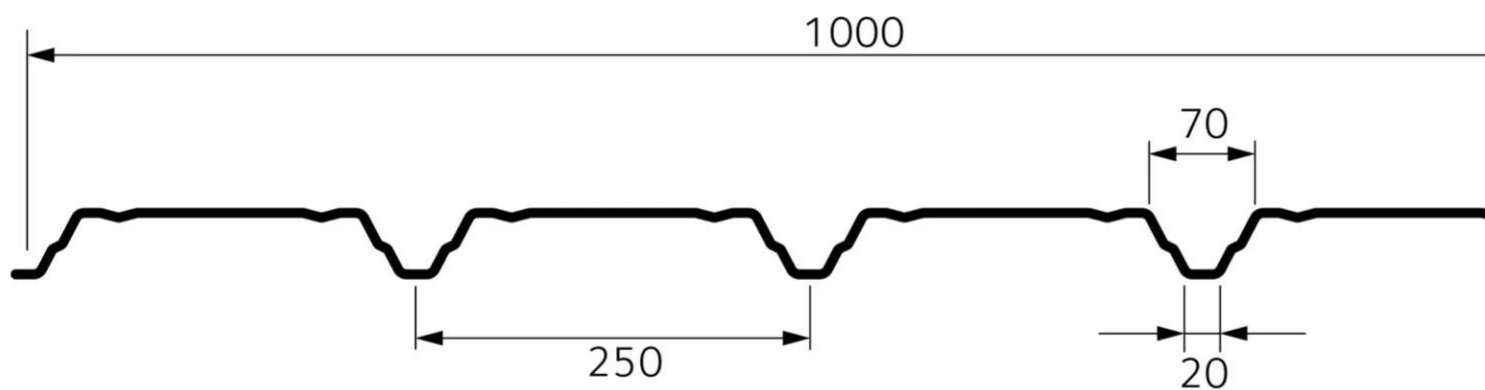

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation

[Request informations](#)

## Related projects





## [Demeter - Montpellier](#)

[Industrial & Logistic](#)

[France](#)

[Montpellier](#)

[\[9006\] Whitealu and 6906 Mineral](#)

[Hairplus® Solexcel® and galvanized steel](#)



## [SNCF technicenter Val Notre-Dame - Argenteuil](#)

[Industrial & Logistic](#)

[France](#)

[Argenteuil](#)

[6995 Gold - \[7022\] Umbra - 4978 white & galvanised](#)