



Promirock® V Acoustic


Promirock V Acoustic is a wall insulating visible fixing sandwich panel that perfectly meets the non-combustibility requirements of public and logistics buildings. Made of a mineral wool core and two prepainted steel facings, the design of its exterior facing is available in different finishes such as ribbed, micro-ribbed & smooth. The internal face is perforated to provide acoustic performances to reduce the reverberation of wall applications


- Acoustic properties thanks to its perforated internal sheet
- Standard cover width: 1 150 mm
- Thermal transmittance U_c down to $0.215 \text{ W/m}^2\cdot\text{K}$ in thickness 200 mm
- Reaction to fire A2-s1,d0
- Standard thickness of facings: External side 0.60 mm/Internal side 0.60 mm
- 8 thicknesses of insulation core available, from 60 to 300 mm
- Vertical or horizontal installation
- Visible fixings



[Contact us](#)




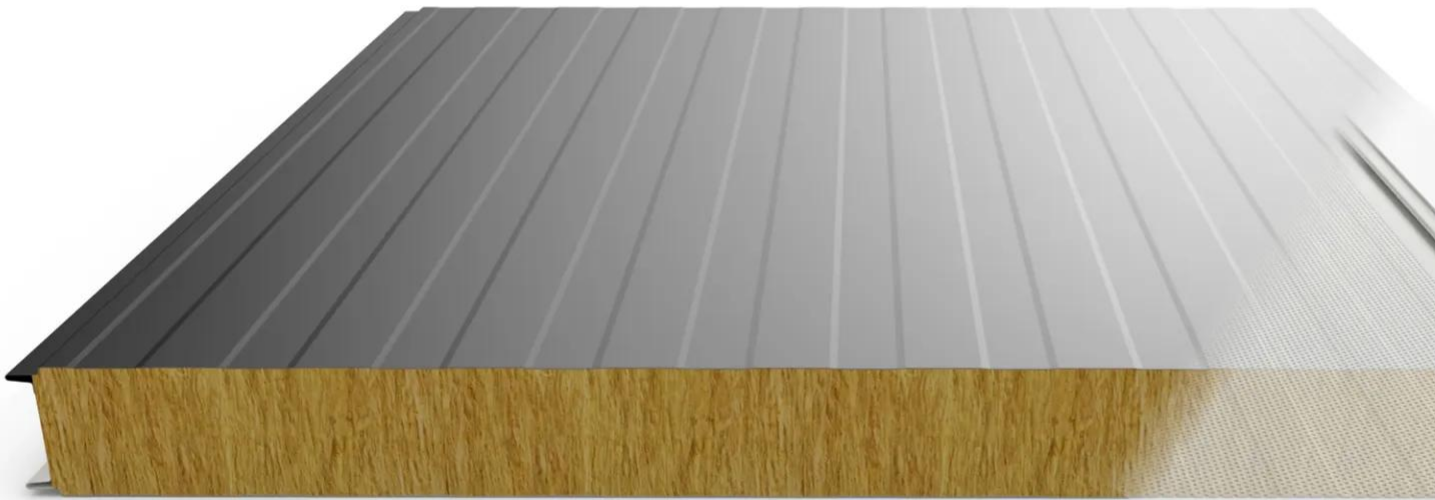


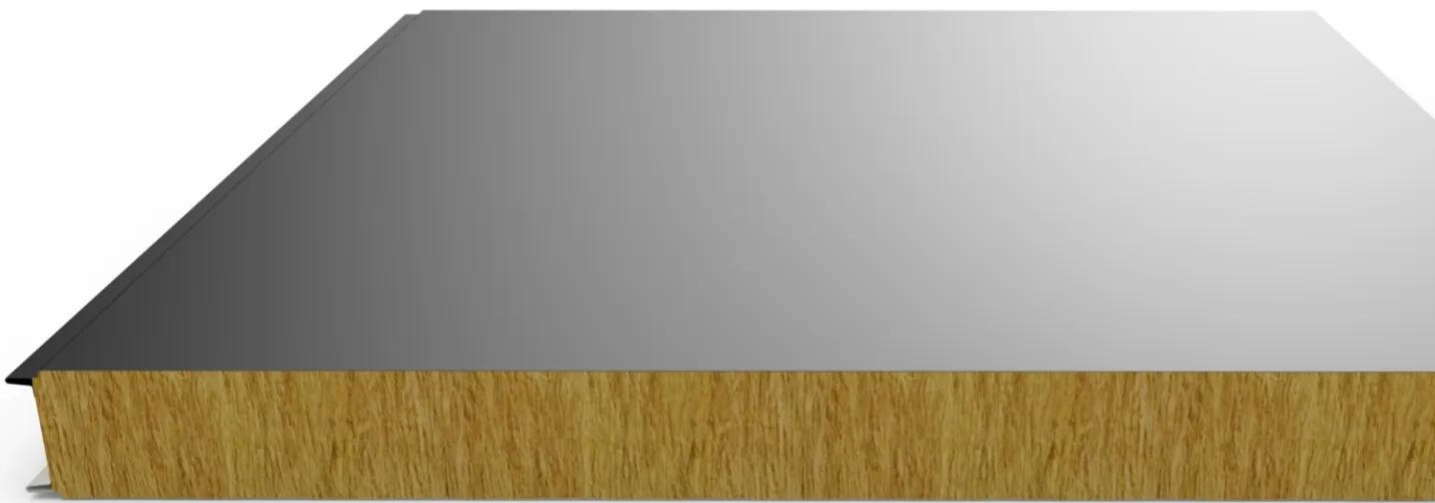


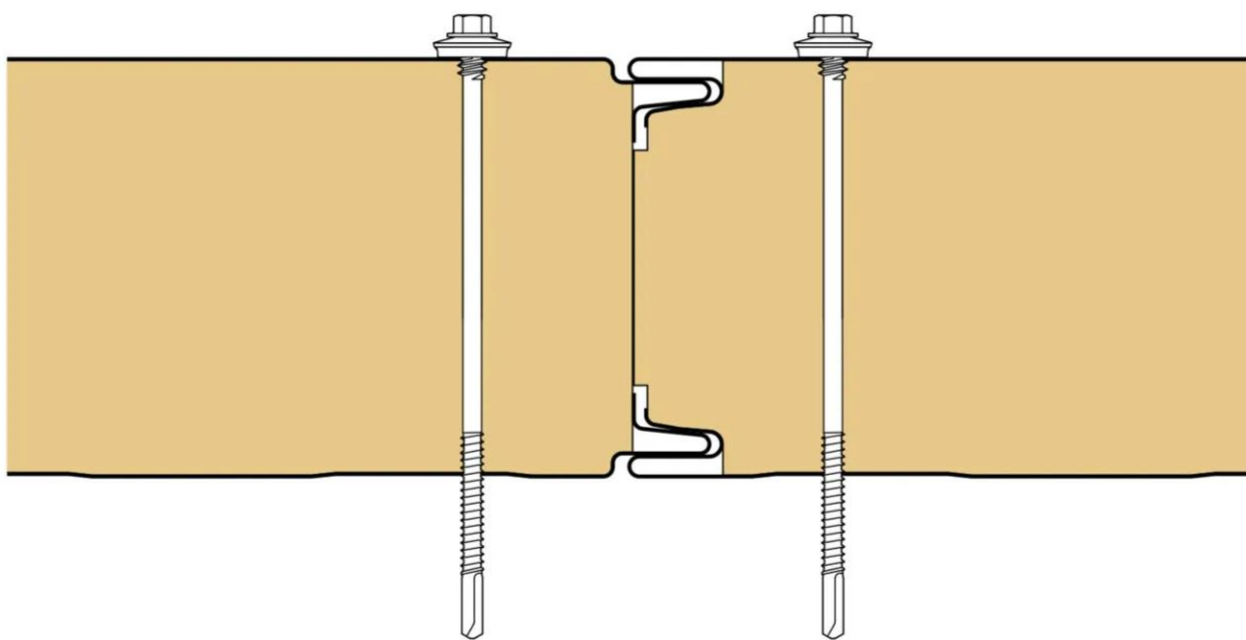


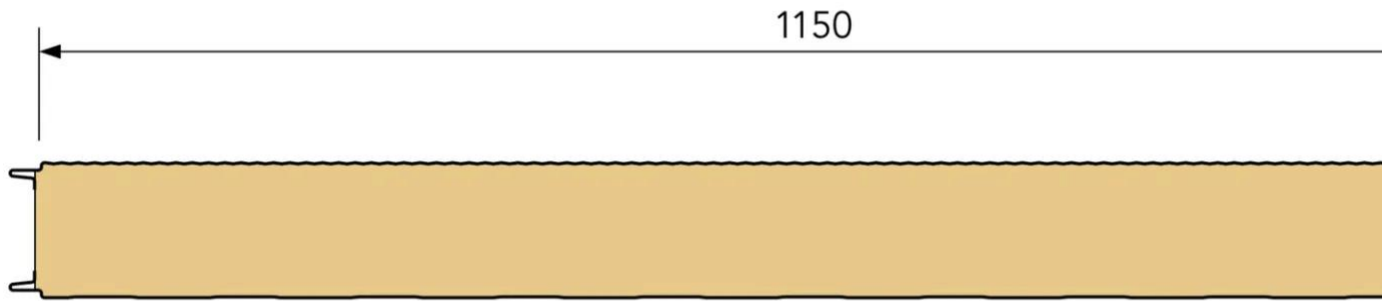

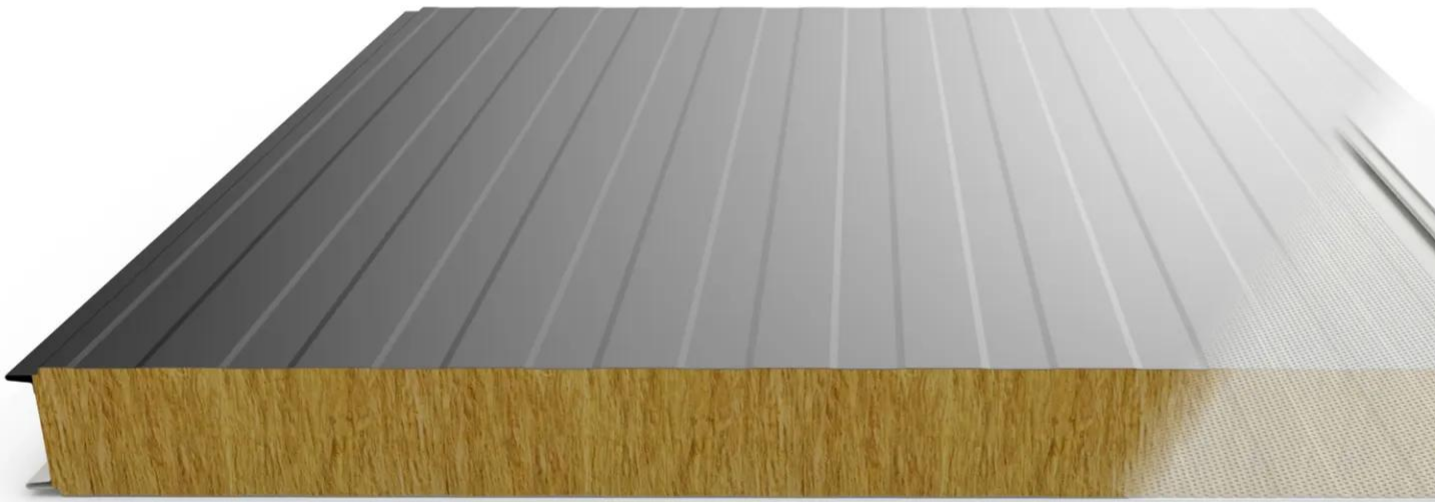

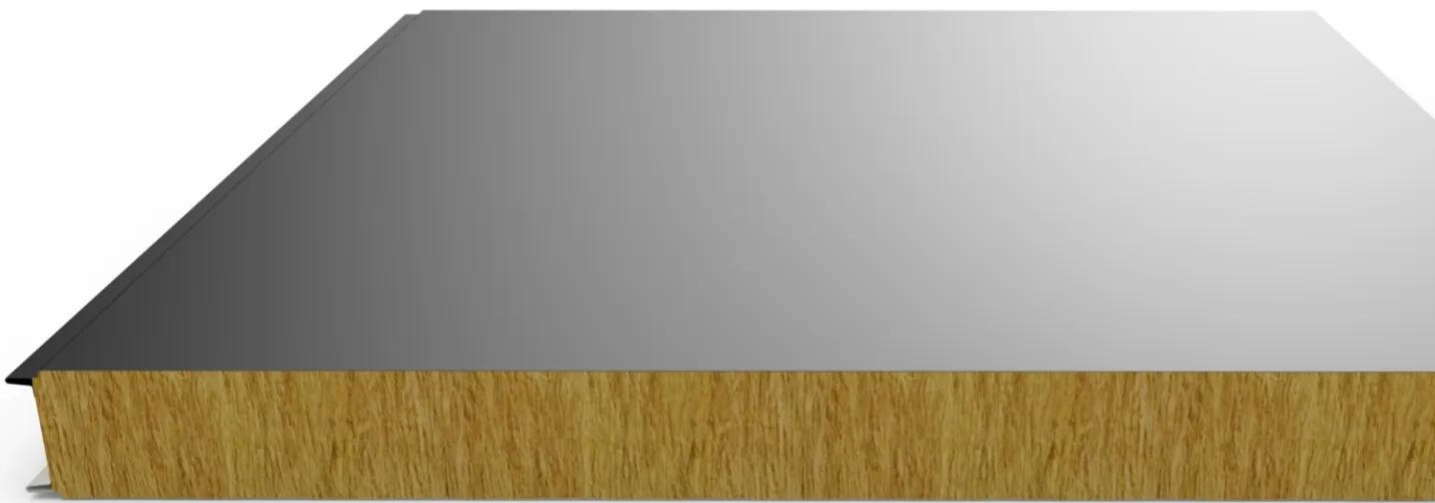

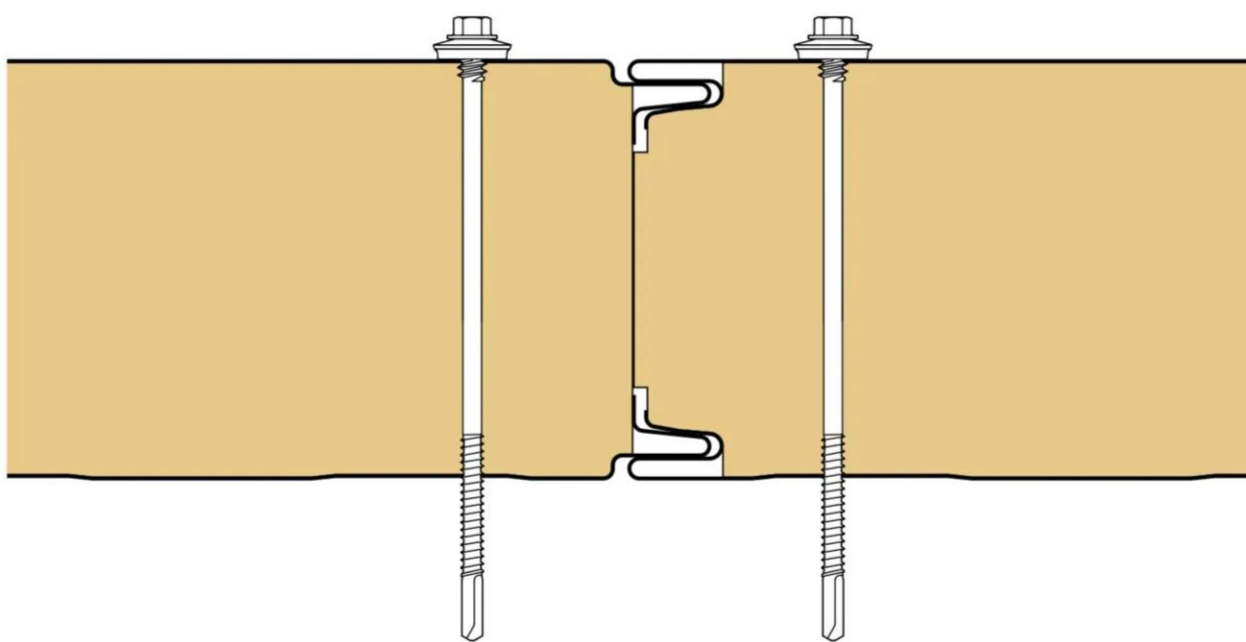

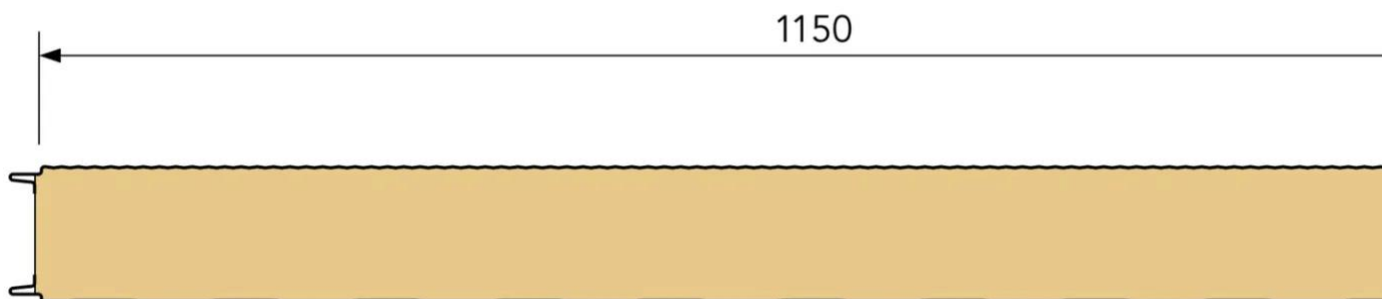

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)