


## Crescendo


Crescendo® 150 and 300 are pre-painted steel siding used as rainscreen cladding with vertical or horizontal joints between profiles. Their association gives the facade a random or progressive kinetics. They can be combined with the siding Cailloc®.


- Validated by CSTB, according "Cahier N°3747 May 2014"
- Crescendo is used on masonry, on twin skin system, on insulation, in new building or in refurbishing.
- Installation on seismic area.
- Fire : uncombustible.
- Pre-painted steel, aStainless steel 1 mm, aluminium 1,5mm.
- Secret fixing
- Width of 150mm and 300 mm with an angle of 92°, they are associated with :
  - Crescendo® 150
  - Crescendo® 300
  - Combinaison possible with Cailloc®
- Maximal length: 6000mm.
- Vertical and horizontal installation
- Perforation possible on request
- BIM object available [here](#)


[Contact us](#)



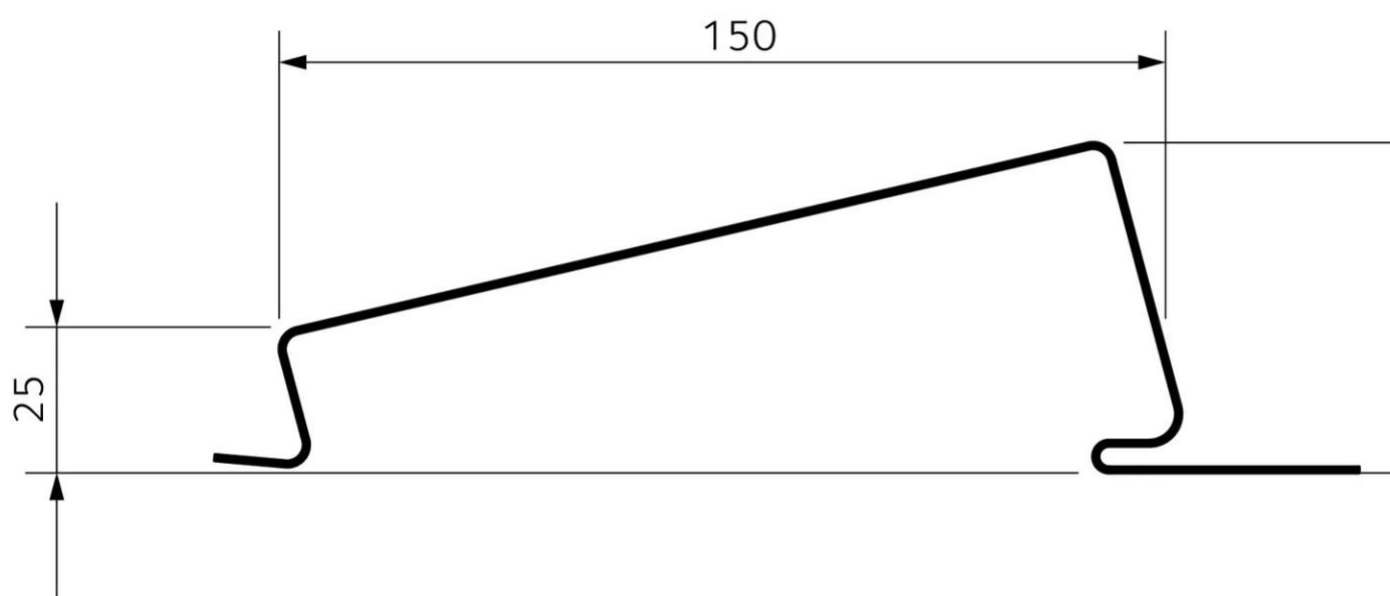

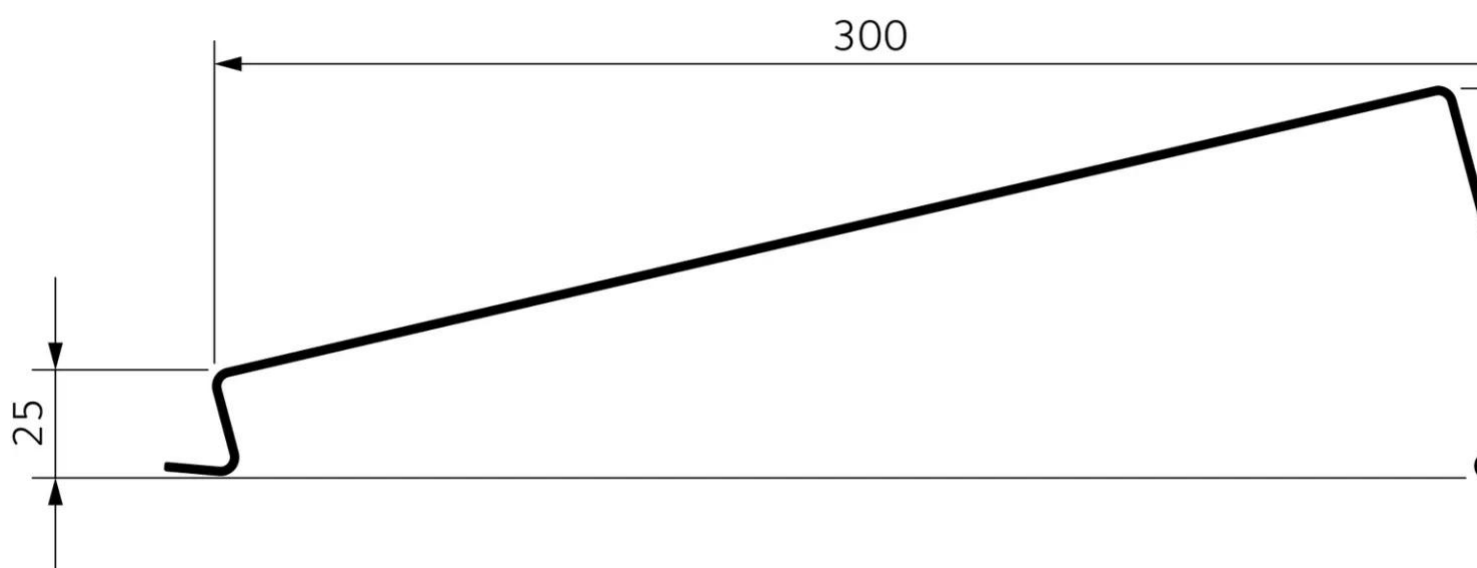

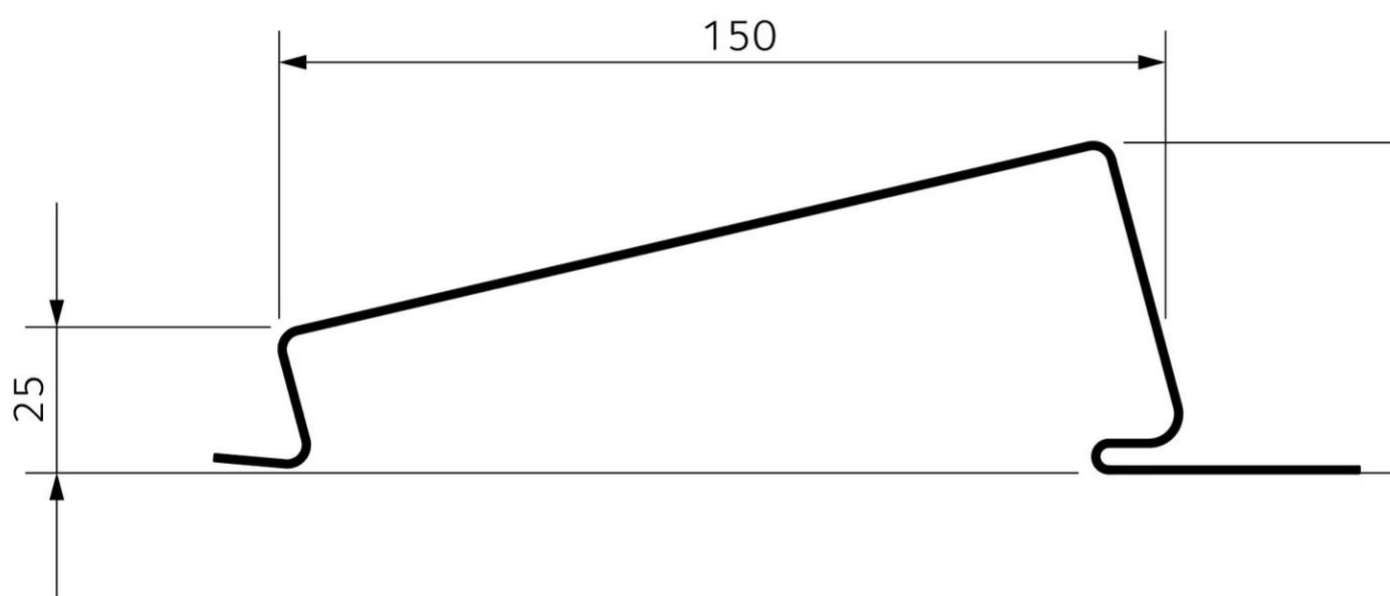

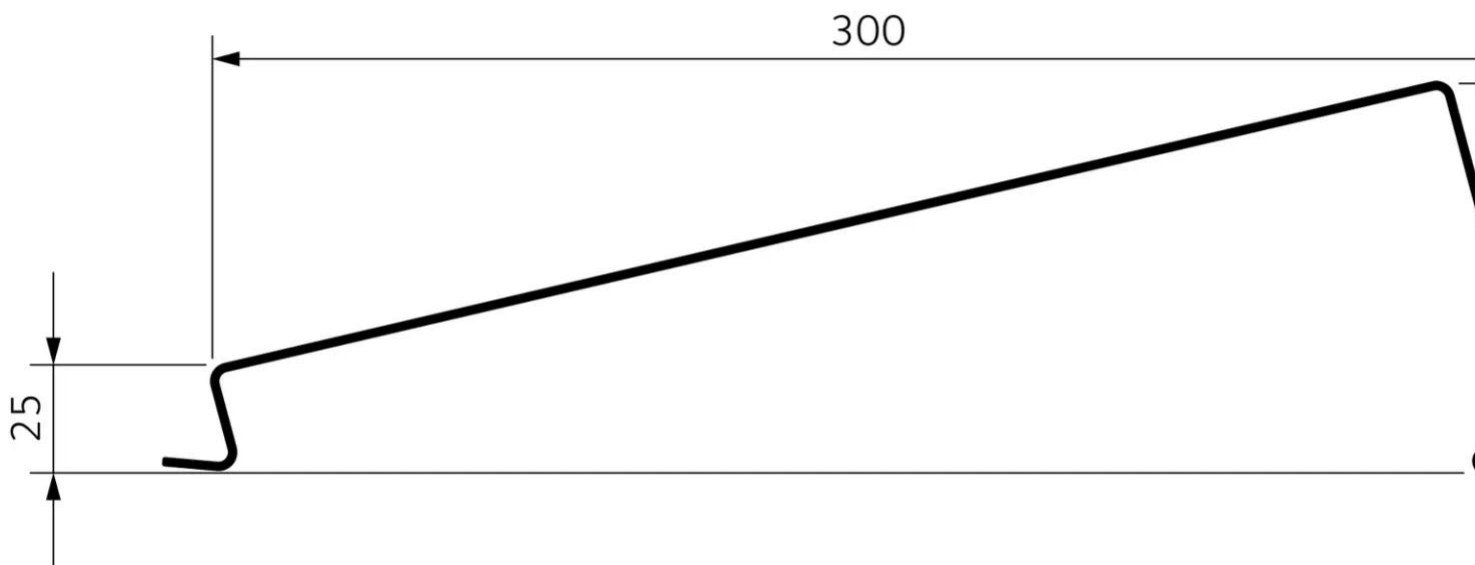

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation

[Request informations](#)

## Related projects



## **Business Park - Marcq En Baroeul**

[Office](#)

[France](#)

[Marcq-en-Barœul](#)

[Authentic 25µ Graphit - Intense Champagne](#)

[Authentic](#)



## **Lime - Limonest**

[Office](#)

[France](#)

[Limonest](#)

[11J8 Solaria](#)

[Pearl](#)