

## ST JD

ST 450 JD/ST 250 JD Type V are bended sidings in pre-painted steel with the aspect of the classical zinc standing seam.

- Validated by CSTB, according "Cahier N°3747 May 2014".
- ST JD is used on masonry, on twin skin system, for new building and refurbishing.
- This product must be installed in vertical
- Installation in seismic area
- Fire : incombustible.
- Secret fixings.
- Span 1500 mm.
- Width :
  - 250 mm : ST250 JD
  - 450 mm : ST450 JD
  - Specific width on request , example 420 mm : ST420 JD.
- Steel thickness:
  - 1 mm prepainted steel for ST 250 JD
  - 1,5 mm prepainted steel for ST450 JD and width > 250 mm.
- Maximal length : 6000 mm.


[Contact us](#)




•





•

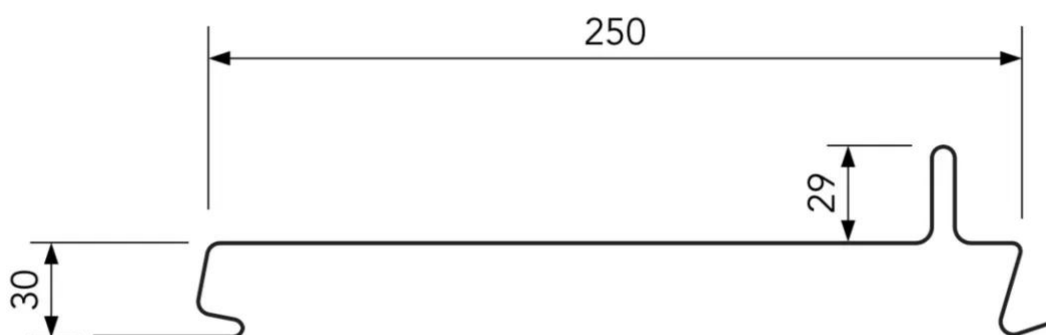




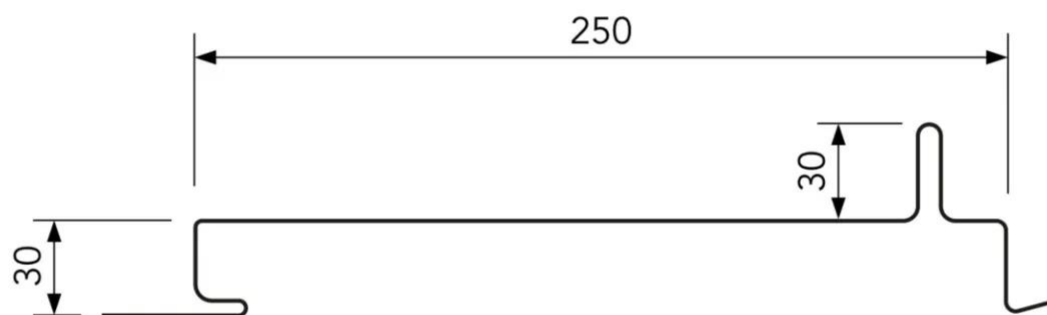

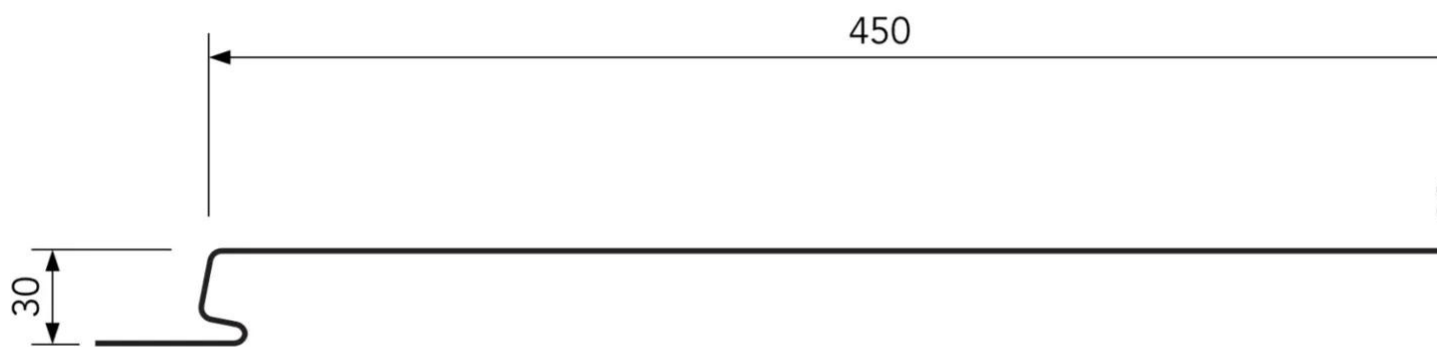


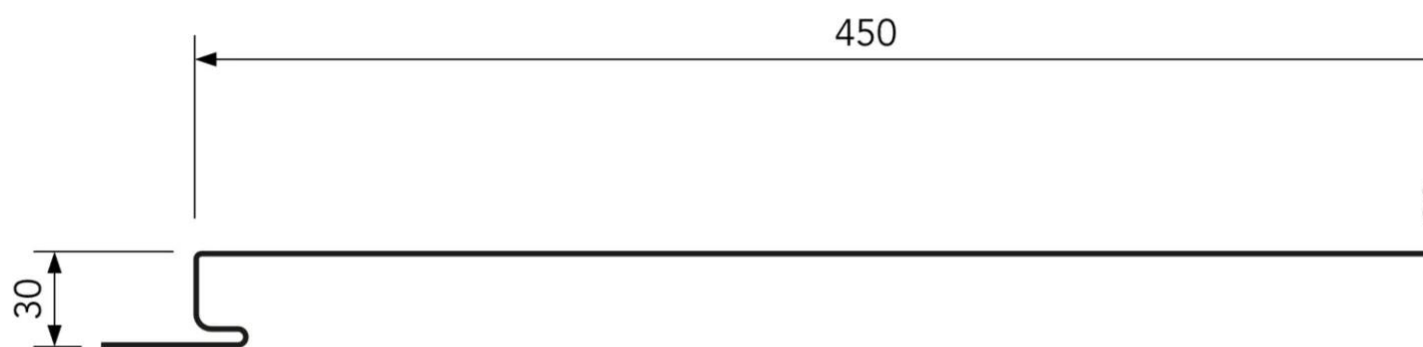




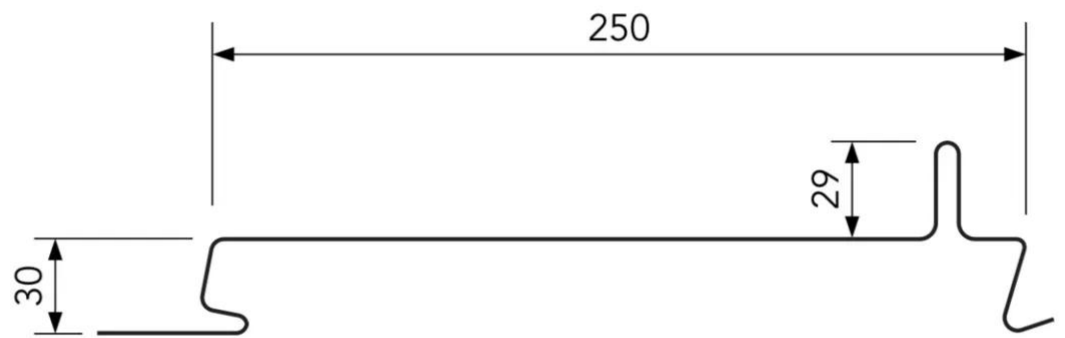




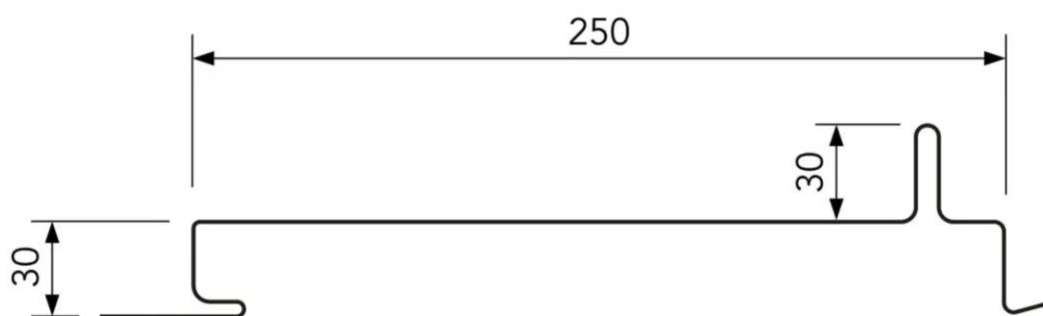

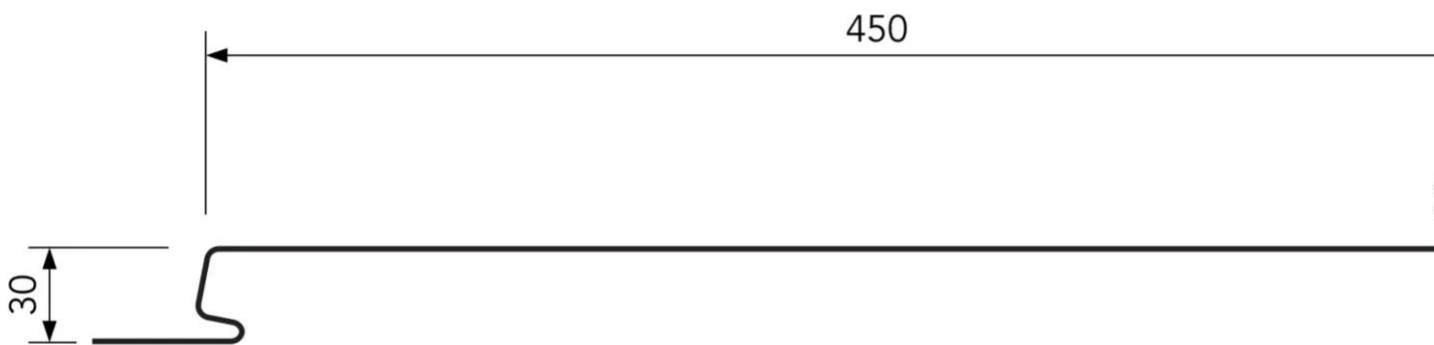



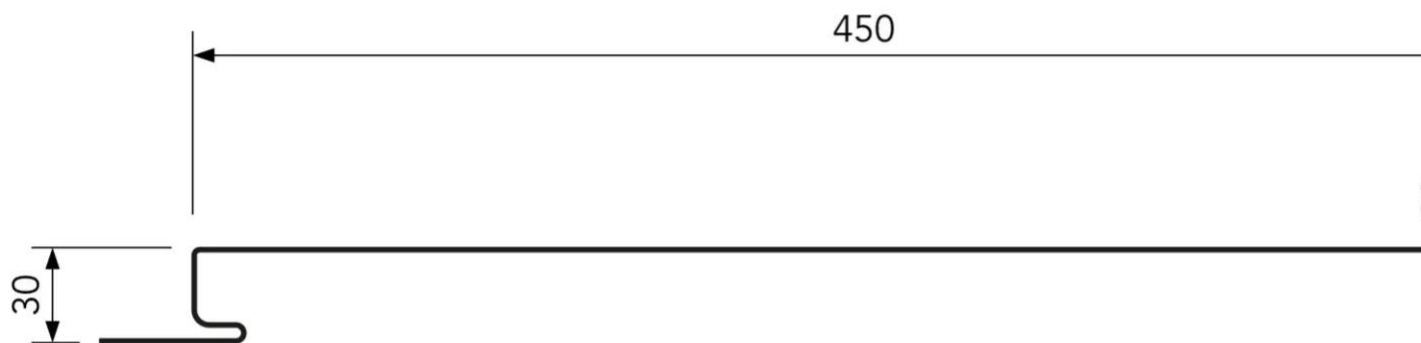

## Properties

## Accessories

[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

[Request informations](#)

## Technical & commercial documentation

[Request informations](#)