Globalwall® CN 123i

Double skin system with an inner structural perforated tray and an external weather steel profile of 0.75mm for very good acoustic absorption.


Composition:

- Hacierba Tray 1.500.90 SRP perforated P with a thickness of 0.75mm
 2Cladacoustic with a thickness of 20mm
 Cladipan 32 with a thickness of 130mm
 Wall cladding profile Trapeza. Frequence or Oceane with a thickness of 0.75mm

Performance and characteristics :

- $\begin{array}{l} \bullet \ \ \mbox{Sound reduction index Rw(C;Ctr)} = 36(-3;-10) \ dB \\ \bullet \ \mbox{Acoustic absorption} \ \alpha w = 1.00 \\ \bullet \ \mbox{Thermal transmittance Up} = 0.28W/m^2.K \ \mbox{estimated} \\ \bullet \ \mbox{Weight: } 21kg/m^2 \\ \bullet \ \mbox{Spacing: 15cm. not including the height of the external weather profile} \\ \end{array}$

Contact us

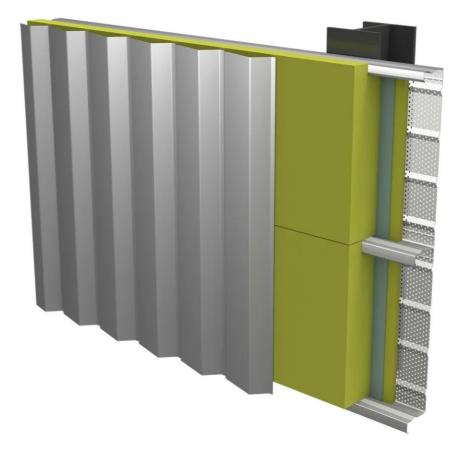



Properties

Accessories

Request informations

Related products

Request informations

Technical documents

Request informations

Technical & commercial documentation

Request informations