

# Supportsol® 40

Supportsol® 40 consists of a trapezoidal profile covered with a wooden panel screwed onto the upper flange of the profile. The additional wood plate gives the necessary stiffness and rigidity to the complex forming an uninsulated dry floor system.

- Allows a very thin and slender construction
- Offers maximum ranges from 0.80m to 1.50m
- Is a lightweight construction with a weight of 7.0 to 12.0kg/m²
- Cover with of 1000mm
- Do not need concrete
- Metallic floor supplied without the wooden panel

[Contact us](#)



- Supportsol-40-3D\_jpg\_productSliderTopBig

## Properties

## Accessories


[Request informations](#)

## Related products

[Request informations](#)

## Technical documents

## Documents

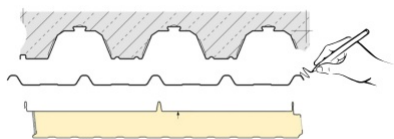

2D Drawing Supportsol® 40

[View document](#)

## Technical & commercial documentation

[Request informations](#)