

Supportsol® 170


Supportsol® 170 is the most performing dry floor system using a deep rolled trapezoidal steel profile. Combined with a wooden panel, which gets screwed to the upper flange of the steel profile, the floor construction can reach spans up to 4.50 m. The additional plate gives the additional stiffness more rigidity to the non-insulated dry floor system providing a high load bearing capacity as well.

- Maximum spans up to 3.0m as single and up to 4.50m as double span system
- Self-weight of 8.9 to 14.9kg/m² including timber plate
- Cover width of 750mm
- Overall height less than 200mm
- Complete dry construction process without any concrete
- Metallic floor supplied without the wooden panel


[Contact us](#)



-

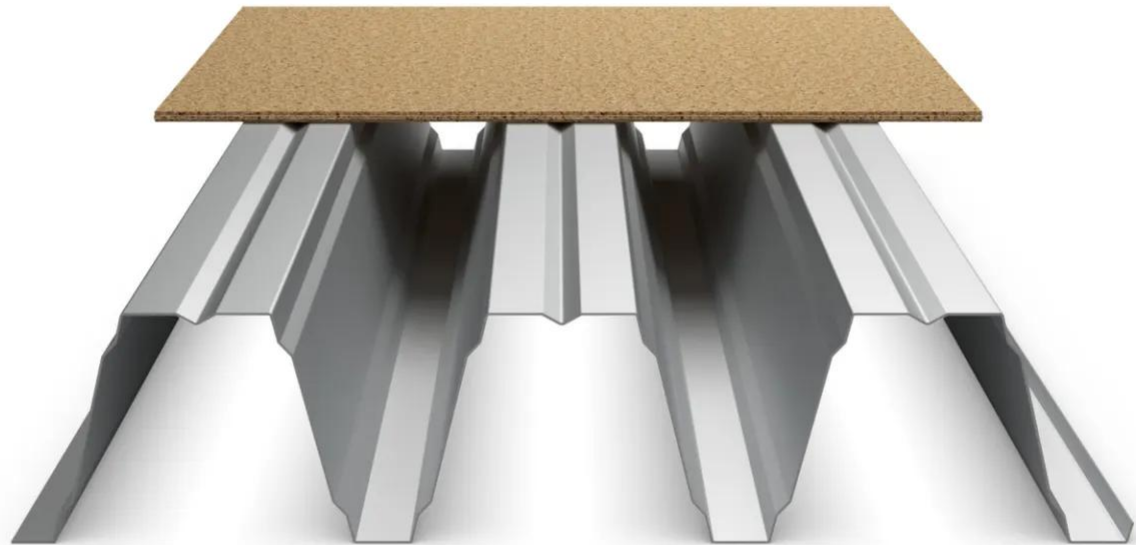

-

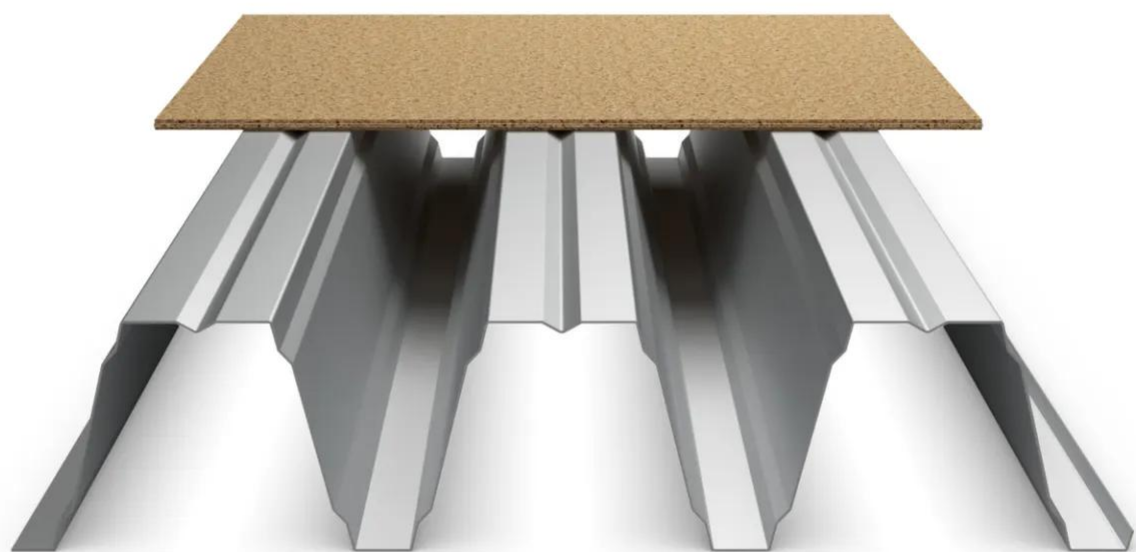

Properties

Accessories

[Request informations](#)

Related products

[Request informations](#)

Technical documents

[Request informations](#)

Technical & commercial documentation

[Request informations](#)